


RC-V8BD1TR Series

8-CHANNEL DIGITALLY ENCODED VIDEO WITH 1-CHANNEL BI-DIRECTIONAL DATA TRANSCIVER




OVERVIEW

RC-V8BD1T/R Series video and data transmitter and receiver transmit eight channels of 8-bit digitally encoded video and one channel of bi-directional data over one core single mode or multimode fiber. Optimized optical modules ensure the highest performance for most demanding CCTV applications. The hot-pluggable and adjustment-free design ensures the convenience of the installation and operation. The modules are available in either standalone or rack mount versions.

APPLICATIONS

- CCTV(Fixed Video)
- Intelligent transportation systems (ITS)
- Security and surveillance
- Access Control

SYSTEM DESIGN

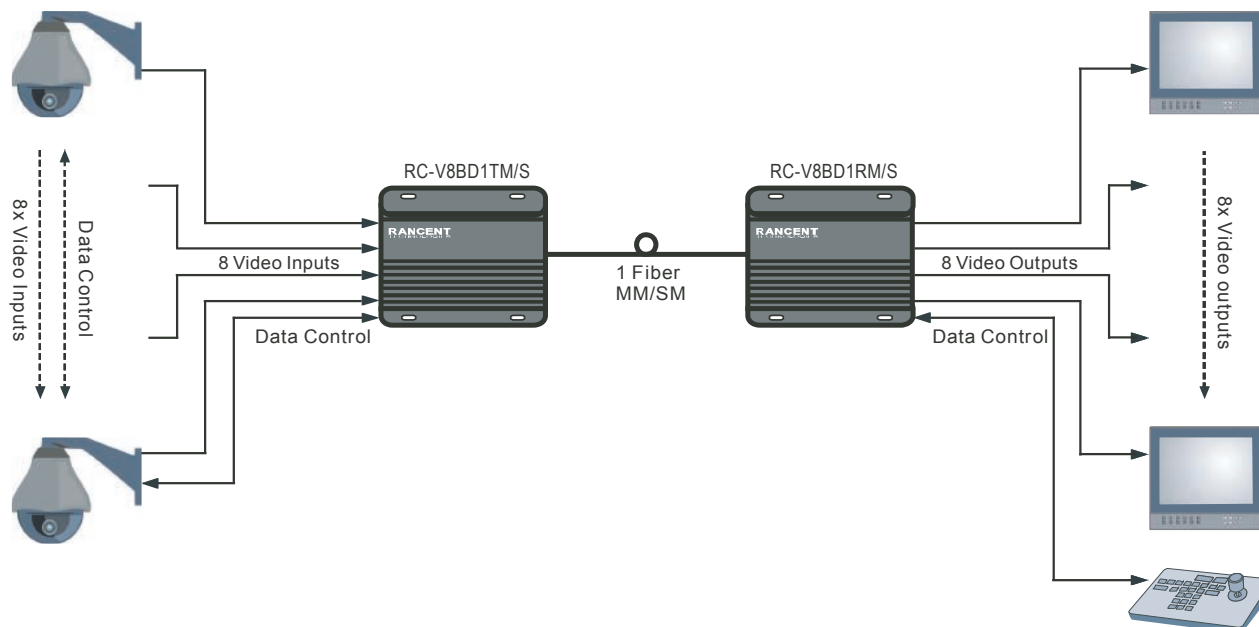

FEATURES

- 8-Bit Digitally Encoded Uncompressed Transmission
- Compatible with NTSC, PAL or SECAM Video Standards
- Simultaneous Transmission of Video and Data
- Simplex or Full-duplex RS485 or RS422 Operation
- High Performance Laser-based Optics
- Plug-and-play Design with No Adjustment Required
- Local LED Indicators to Monitor System Status
- Wide Optical Dynamic Range
- No EMI, RFI, Cross Talk and Video Distortion
- Support up to 30KM
- No Video Degradation and Optical Attenuation
- Multimode or Singlemode Fiber
- Standalone or Rack Mount Options

RC-V8BD1TR Series

8-Channel Digital Encoded Video with 1-Channel Bi-Data Transceiver

SPECIFICATIONS

Video

Video Input	1 volt pk-pk (75 ohms)
Video Voltage Range	0.6~2.0Vp-p
Video Input/Output Channels	8
Bandwidth	5 Hz to 8 MHz
Bit Resolution	8-bit
Differential Gain	1%
Differential Phase	<1°
Tilt	< 1%
S/N Ratio	> 60dB (Weighted)

Data

Data Protocol	RS485/RS422/RS232
Data Rate	0~300kps
Data Channels	1 (Bi-directional)
Error Rate	10

Indicating LEDs

Power Present
Video Present

Optical

Wavelength	850/1310nm, MM 1310/1550nm, SM
Optical Emitter	Laser Diode
Number of Fiber	1

Connectors

Optical	ST or SC
Video	BNC

General

Power Supply	DC5V 2A
Size	152 x 130 x 49.5mm
Construction:	Aluminum
Finish:	Paint
MTBF:	> 100,000 hours
Operating Temp	-35° C to + 65°C
Storage Temp	-40° C to +85°C

ORDERING INFORMATION

Part Number	Description	Fiber	Optical PWR Budget	Maximum Distance
RC-V8BD1TS	8 Video/1 Bi Data Transmitter	Singlemode	20dB	30KM
RC-V8BD1RS	8 Video/1 Bi Data Receiver	Singlemode	20dB	30KM
RC-V8BD1TM	8 Video/1 Bi Data Transmitter	Multimode	14dB	2KM
RC-V8BD1RM	8 Video/1 Bi Data Receiver	Multimode	14dB	2KM

*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.