


RC-V1A1TR-DVI Series

1-CHANNEL NON-COMPRESSED DVI /
1-CHANNEL FORWARD AUDIO TRANSCIEVER




OVERVIEW

RC-V1A1TR-DVI Series DVI transmitter and receiver are designed to send one channel of 1.2/1.3 compliant DVI, one channel of forward audio, one PC port and two USB ports for keyboard & mouse control over one core single mode or multimode fiber. Fully compliant with all the video resolutions up to 1080p, 60Hz, these models ensure the highest performance for most demanding digital video and broadcast applications. The hot-pluggable and adjustment-free design ensures the convenience of the installation and operation. The modules are available in either standalone or rack mount versions.

APPLICATIONS

- Digital broadcast television systems
- Digital video distribution systems
- Extremely high quality video conferencing
- Concert & sporting event video displays

SYSTEM DESIGN

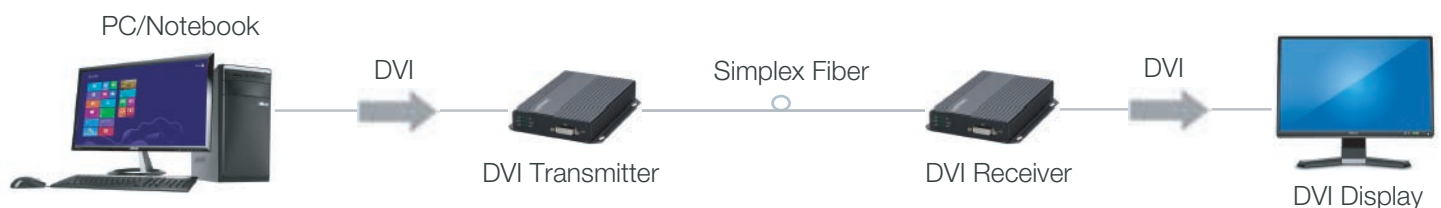

FEATURES

- Extend DVI video up to 1080p, 60Hz
- Graphic resolutions up to 1920x1080 over one fiber
- Uses all-digital processing & transmission for crystal-clear signals and no color skewing
- DVI 1.2/1.3 and HDCP V1.2 Standard Compliant
- No settings or adjustments necessary
- Simultaneous transmission of Forward Audio
- Two USB ports for keyboard & mouse control
- Diagnostic LEDs for power and link activity status
- Built-in ESD protection system
- Available for both singlemode and multimode applications
- Multimode distances available in excess of 500 meters
- Singlemode unit supports distances up to 30km

RC-V1A1TR-DVI Series

1-Channel Non-compressed DVI /
1-Channel Forward Audio Transceiver

SPECIFICATIONS

DVI		Audio	
Signal Type	DVI DVI 1.2/1.3 & HDCP 1.1/1.2	Signal Type	Standard 3.5mm Stereo Audio
Video Resolution	1280x720@50Hz, 1280x720@60Hz, 1920x1080(1080I)@50Hz, 1920x1080(1080I)@60Hz, 1920x1080(1080P)@50Hz, 1920x1080(1080P)@60Hz	Connector	Optical LC Video&Audio DVI Audio 3.5mm Audio Jack Port USB Standard USB (Mouse/Keyboard)
Optical		General	
Wavelength	1310/1550nm	Power Supply	DC12V 1A
Optical Emitter	SFP Laser	Size	152 x130 x28.8mm
Optical Fiber	9/125u single mode	Construction:	Aluminum
Number of Fibers	1	Finish:	Paint
		MTBF:	> 100,000 hours
		Operating Temp:	-35° C to +65°C
		Storage Temp:	-45° C to +85°C

ORDERING INFORMATION

Part Number	Description	Fiber	Optical PWR Budget	Max Distance
RC-V1A1TS-DVI	1-CH DVI with 1-CH Forward Audio TX	SM	20dB	30KM
RC-V1A1RS-DVI	1-CH DVI with 1-CH Forward Audio RX	SM	20dB	30KM
RC-V1A1TM-DVI	1-CH DVI with 1-CH Forward Audio TX	MM	10dB	500M
RC-V1A1RM-DVI	1-CH DVI with 1-CH Forward Audio RX	MM	10dB	500M

*Optical transmission distance is limited to optical loss of the fiber and any additional loss introduced by connectors, splices and patch panels.